


FINO SPOT 2

Housing: Spotlight, solid aluminium housing, 330° hinge
Design: Ulrich Sattler

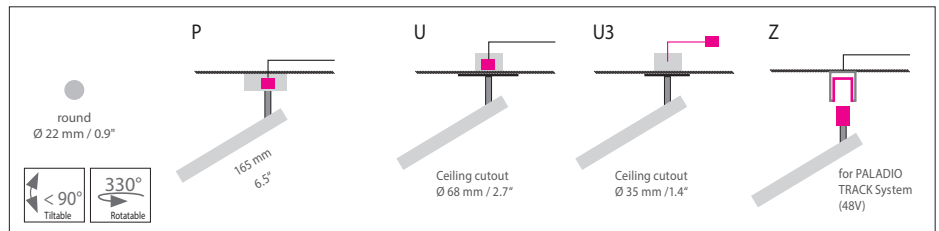

| | Size: Ø / L mm | Inches | LED Watt | Lumen ¹⁾ | Weight ²⁾ kg/lbs | Item No. | LED | Dimming | LED | Finish | Power supply cable | Mounting version |
|------------------|-----------------|--|--|---|---------------------------------|---|----------|---------|------|--------|--------------------|------------------|
| Size | Ø 22 / L 165 mm | Ø 0.9 / L 6.5" | 4 | 365 | 0,4 / 0.88 | 1539. | X X. | X X. | X X. | X X. | X X X. | X X |
| LED | | Standard: Warm-white | 3000 K | | | X X X X. | 30. | X X. | X X. | X X. | X X X. | X X |
| CRI > 90 | | Optional: Neutral-white | 4000 K | | | X X X X. | 40. | X X. | X X. | X X. | X X X. | X X |
| | | Extra warm-white | 2700 K | | | X X X X. | 27. | X X. | X X. | X X. | X X X. | X X |
| SELV | | | | | | | | | | | | |
| Dimming | | Standard: TRIAC | | | | X X X X. | X X. | 11. | 00. | X X. | X X X. | X X |
| | | DALI | | | | X X X X. | X X. | 61. | 00. | X X. | X X X. | X X |
| | | Optional: DALI | | | | X X X X. | X X. | 61. | 00. | X X. | X X X. | X X |
| | | Casambi | | | | X X X X. | X X. | 81. | 00. | X X. | X X X. | X X |
| Finish | | Standard: 66 bronze anodised brushed | Optional: 60 silver anodised brushed | 62 black anodised brushed | 65 champ. gold anodised brushed | 12 white, powder coated, similar RAL 9003 | | | | | | |
| Standard: | | | | | | | X X X X. | X X. | X X. | X X. | X X X. | X X |
| Mounting version | | Standard: Direct ceiling mounting with power supply unit in canopy | Optional: U Cover Ø 80 mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in cavity box | U3 Cover Ø 50 mm / 2.0" 3) Ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling | | | | | | | | |
| Standard: | | | | | | | X X X X. | X X. | X X. | X X. | X X X. | X X |
| | | | | | | | | | | | | |

| Canopy: | Type | For use with Mounting version | Protective rating |
|---|----------|-------------------------------|-------------------|
| | DA 50 | U3 | IP 40 |
| | | | |
| | DA 80 | U | IP 40 |
| | | | |
| | DB 78/32 | P | IP 40 |
| | | | |
| Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz. | | | |

| | | | | | | |
|-------|-----|-----|-----|-----|------|-----|
| 1539. | --- | --- | 00. | --- | 000. | --- |
|-------|-----|-----|-----|-----|------|-----|

Complete order number

Compatible TRIAC Dimmers

| Manufacturer | Model | Quantity of parallel connection |
|------------------|---------------------|---------------------------------|
| JUNG | 1224 LED UDE | 14 |
| JUNG | 1731 DD | 10 |
| Merten | SBD200LED | 13 |
| ABB Busch-Jaeger | 6519 U | 15 |
| ABB Busch-Jaeger | 6526 U | 13 |
| Berker | 296110 | 10 |
| Berker | 2973 | 12 |
| Schneider | SBD200LED ELG174231 | 13 |

