



## PALADIO CONNECT 54

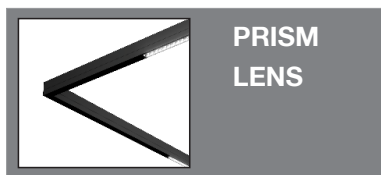

Housing: Aluminium profile with blind cover (or optionally with integrated microprismatic diffuser and power supply)  
Design: SATTLER

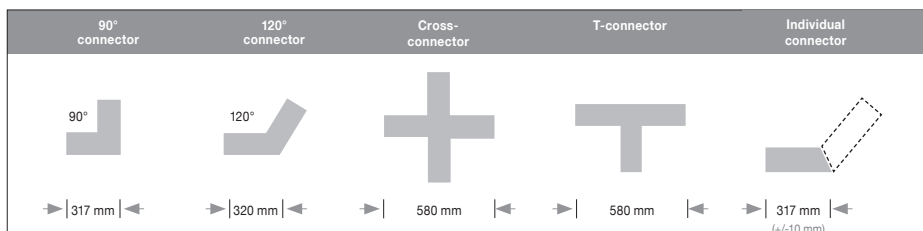


**PALADIO CONNECT** elements are connectors for the PALADIO PRISM and LENS system luminaire series. They make it possible to create complex structures within the respective series or between PRISM and LENS series. Connectors for PALADIO LENS system are always directly and indirectly applied with blind covers. PALADIO PRISM connectors are functional and contain their own 230V power supply. All connectors can, however, only be operated with a complete system.


	L x W x H mm	Wattage direct	Lumen	Weight <sup>2)</sup> kg	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable
<b>Connectors</b>	<b>90° connector</b>	<b>317 x 317 x 87</b>	10	1.152	<b>2230.</b>	X X.	X X.	X X. X X.	X X. X X.	X X.	X X X.
	<b>120° connector</b>	<b>320 x 320 x 87</b>	10	1.152	<b>2231.</b>	X X.	X X.	X X. X X.	X X. X X.	X X.	X X X.
	<b>Cross-connector</b>	<b>580 x 580 x 87</b>	20	2.304	<b>2232.</b>	X X.	X X.	X X. X X.	X X. X X.	X X.	X X X.
	<b>T-connector</b>	<b>580 x 320 x 87</b>	15	1.728	<b>2233.</b>	X X.	X X.	X X. X X.	X X. X X.	X X.	X X X.
	<b>Individual connector</b>	<b>317 x 317 x 87</b> (+/- 10 mm)	10	1.152	<b>2234.</b>	X X.	X X.	X X. X X.	X X. X X.	X X.	X X X.

CONNECT elements for PALADIO system luminaires cannot be operated separately. There is always the necessity for a connection to a system luminaire of the PALADIO series PRIS or LENS.


### Mounting version



Pendant



Surface mounted



Recessed with frame

X X X X.

--.

X X.

X X.

X X.

X X.

X X.

X X X.

### Finish

#### Standard



**66**  
bronze anodised

Optional



**60**  
silver anodised



**62**  
black anodised



**65**  
champ. gold anodised

X X X X.

X X.

--.

X X.

X X.

X X.

X X.

X X X.

### LED direct



#### LED

##### Standard:

**PALADIO LENS, PRISM:**  
**Blind cover**

X X X X.

X X.

X X.

00.

00.

00.

00.

X X.

CRI > 90 | UGR < 19  
MacAdam 3 |  
L 80 | B10 72.000 h



##### Optional:

#### **PALADIO PRISM:**

Neutral-white

4000 K

Warm-white

3000 K

X X X X.

X X.

X X.

40.

X X.

X X.

X X.

X X X.

X X X X.

X X.

X X.

30.

X X.

X X.

X X.

X X X.

##### **DIFFUSER**

#### **PALADIO PRISM:**

Microprism symmetrical, 65° beam angle

X X X X.

X X.

X X.

X X.

10.

00.

00.

X X.

The indirect side is always covered with blind covers

### Dimming

##### Standard:

Dimmable with system luminaire

X X X X.

X X.

X X.

X X.

X X.

X X.

06.

X X X.

### Power supply cable

No power supply cable necessary, wiring with system luminaire through 220-240 VAC/DALI connecting brackets

X X X X.

X X.

X X.

X X.

X X.

X X.

X X.

000.

Pieces:



Complete order number:



Handcrafted in Germany, certified quality



Protective rating of luminaire



Light distribution direct



Protection class I




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F.

## PALADIO SYSTEM

### ORDER EXAMPLE

The diverse components of the PALADIO series give you the possibility to create your individually designed PALADIO SYSTEM LUMINAIRE. The illustration below shows only one of the various possibilities offered by the PALADIO System.

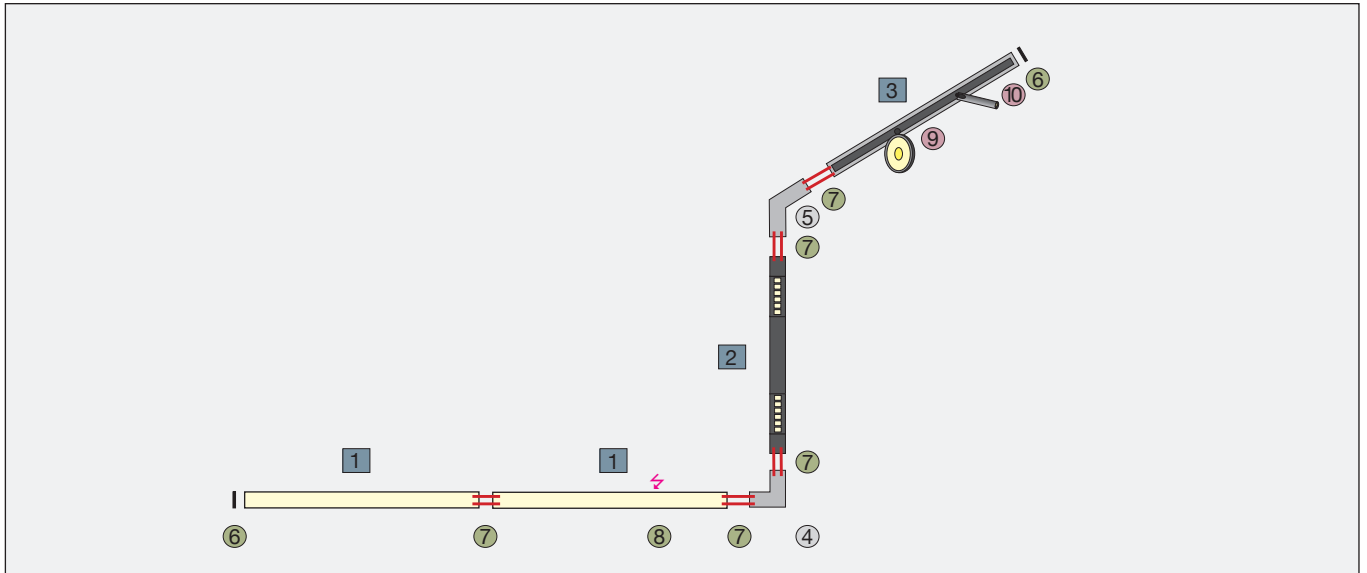

Luminaires	Connectors	Accessories	Light elements (TRACK)
<ul style="list-style-type: none"> <li>1 PRISM 1130 mm</li> <li>2 LENS 1410 mm</li> <li>3 TRACK 1410 mm</li> </ul>	<ul style="list-style-type: none"> <li>4 90° connector</li> <li>5 120° connector</li> </ul>	<ul style="list-style-type: none"> <li>6 End caps</li> <li>7 *Connector Set</li> <li>8 Power supply cable</li> </ul>	<ul style="list-style-type: none"> <li>9 AVVENI SPOT</li> <li>10 FINO SPOT 2</li> </ul>