
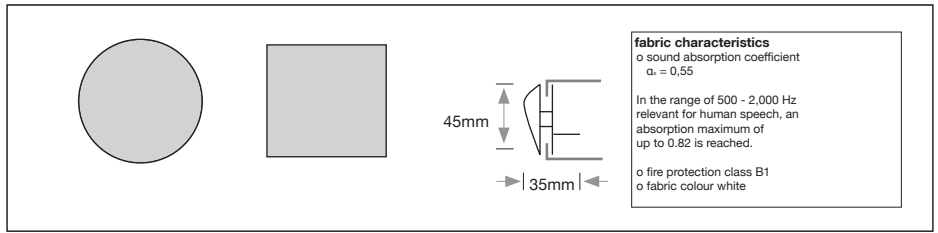


## Acoustic Panel

Housing: Aluminium frame with acoustic membrane (without illumination)  
 Design: SATTLER

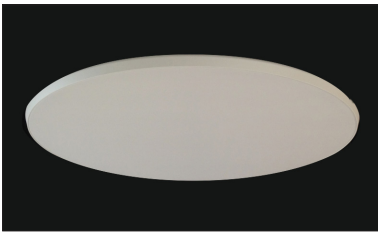

**fabric characteristics**  
 o sound absorption coefficient  
 $\alpha_w = 0,55$   
 In the range of 500 - 2.000 Hz relevant for human speech, an absorption maximum of up to 0.82 is reached.  
 o fire protection class B1  
 o fabric colour white

Size: Ø mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg / lbs	Item No.	LED	Dimming	Finishes	Power supply cable	Mounting version
<b>Sizes</b>										
	Ø 1272 mm	50.1"		3.5 / 7.7	<b>1042.</b>	x x.	x x. x x.	x x.	x x x.	x
	Ø 1582 mm	62.3"		4.2 / 9.2						
	1260 x 1260 mm	49.6 x 49.6"		6.5 / 14.3	<b>1062.</b>	x x.	x x. x x.	x x.	x x x.	x
	1560 x 1560 mm	61.4 x 61.4"		8.2 / 18.0						
<b>Finishes</b>										
(Standard)		acoustic fabric white			x x x.	x x.	x x. x x.	x x.	x x x.	x
		4 point suspension		<b>Standard</b>	x x x.	x x.	x x. x x.	x x.	x x x.	<b>B.</b>
		Direct ceiling mounting		Optional	x x x.	x x.	x x. x x.	x x.	x x x.	<b>H.</b>
<b>Mounting version with steel cable length 5000 mm</b>										
					x x x.	x x.	x x. x x.	<b>. .</b>	x x x.	x

▶ 

x x x.	x x.	x x. x x.	x x.	x x x.	x
--------	------	-----------	------	--------	---

  
**Complete order number**