





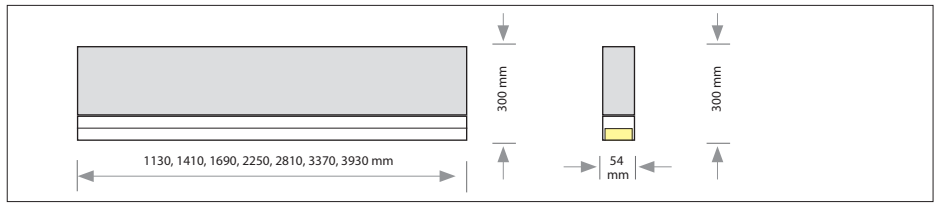

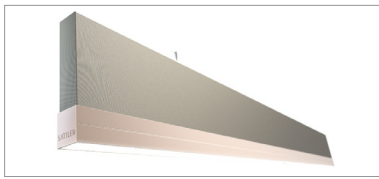
















BAFFLE LIGHT PRISM

54

Housing: Acoustic baffle out of microfiber material with fabric or fleece cover or PET staple fibre with aluminium profile with integrated microprismatic diffuser and power supply.
 Design: Prof. Alexander Reichel, SATTLER



L x W x H mm	LED Watt	Lumen direct Microprismatic	Lumen / W	Weight ² kg without baffle	Item. No.	Mounting	Colour	LED Direkt Light colour Diffuser	Acoustic element Baffle Material	Dimming	Power supply cable					
BAFFLE 1130 x 54 x 300	23	2.440	107	2,4	2070.	X X.	X X.	X X. X X.	X X. X X X.	X X.	X X X.					
1410	28	3.040	107	3,0	2071.	X X.	X X.	X X. X X.	X X. X X X.	X X.	X X X.					
1690	34	3.650	107	6,9	2076.	X X.	X X.	X X. X X.	X X. X X X.	X X.	X X X.					
2250	45	4.850	107	4,7	2072.	X X.	X X.	X X. X X.	X X. X X X.	X X.	X X X.					
2810	57	6.060	107	5,9	2073.	X X.	X X.	X X. X X.	X X. X X X.	X X.	X X X.					
3370	68	7.270	107	7,0	2074.	X X.	X X.	X X. X X.	X X. X X X.	X X.	X X X.					
*from 2810 mm acoustic baffle multi-part 3930	79	8.480	107	8,3	2075.	X X.	X X.	X X. X X.	X X. X X X.	X X.	X X X.					
Mounting version	 0A Pendant					X X X X.	0A.	X X. X X. X X.	X X. X X X.	X X.	X X X.					
Finish Aluminium Profile	 66 bronze anodized	 60 silver anodized	 62 black anodized	 65 champ. gold anodized		X X X X.	X X.	<input type="checkbox"/> X X. X X. X X.	X X X. X X.		X X X.					
LED direct	 Standard: Optional: CRI > 90, *CRI 80 MacAdam 3 L 90 B10 bei 72.000 h	Neutral-white Warm-white Tunable white	4000 K 3000 K 2700 - 6500 K*		X X X X. X X X X. X X X X.	X X. X X. X X.	X X. X X. X X.	40. 30. 80.	X X. X X. X X X. X X. X X. X X X. X X. X X. X X X.	X X. X X. X X.	X X X. X X X. X X X.					
SELV	DIFFUSER Standard:	Microprism symmetrical, 65° beam angle			X X X X.	X X.	X X. X X.	10.	X X. X X X.	X X.	X X X.					
Baffle fabric or fleece cover - mineral wool	Sound absorption class C aw: 0,6 Fire protection class A2/s1, d0	 V 01 Fleece white	 B 01 white	 B 02 black	 B 03 metal grey	 B 04 blue-black	 B 05 seagreen	 B 06 olive	 B 07 light brown	 B 08 light grey						
Baffle PET staple fibre	30% recycled material Sound absorption class A aw: 0,95 Fire protection class B1/Cs3, d0	 P 05 white	 P 01 black	 P 02 bronze	 P 03 champ. gold	 P 04 silver					X X X X.	X X.	X X. X X. X X.	02.	<input type="checkbox"/> X X.	X X X.
Dimming	Standard:	Dimmable to 1% via Dali-2, switch Dim			X X X X.	X X.	X X. X X. X X.	X X. X X. X X.	X X. X X X.	06.	X X X.					
Power Supply Cable		Z91 PVC cable transparent, 1,5mm			X X X X.	X X.	X X. X X. X X.	X X. X X. X X.	X X. X X X.	X X.	Z91.					

Accessoires see page 2

Quantity:

Order number:

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	02.	<input type="text"/>	06.	Z91.
----------------------	----------------------	----------------------	----------------------	----------------------	-----	----------------------	-----	------



Handcrafted in
Germany,
Certifizierte Qualität

230V

IP 20

Protective rating
of luminaire



Light distribution
direct



Protection class I



Luminaires are suitable for mounting
on ordinary flammable materials, which
have an inflammation point of at least
200° C / 392° F

BAFFLE LIGHT PRISM

54

Housing:


Acoustic baffle out of microfiber material with fabric or fleece cover or PET staple fibre with aluminium profile with integrated microprismatic diffuser and power supply.

Design:

Prof. Alexander Reichel, SATTLER

Accessoires:

Connection box
Surface mounted connection box + support of steel cable suspension



L: 70 mm
B: 70 mm
H: 30 mm



12
white powder coated
RAL 9003



60
silver anodized



62
black
anodized



65
champ. gold
anodized



66
bronze
anodized

Item. No.

Quantity


2002.00.00.00.00.12	_____
2002.00.00.00.00.60	_____
2002.00.00.00.00.62	_____
2002.00.00.00.00.65	_____
2002.00.00.00.00.66	_____

Illumination:


L x W x H mm

Item. No.

Direct side with microprism- full surface illumination



1130 x 54 x 300 mm	2070.
1410	2071.
1690	2076.
2250	2072.
2810	2073.
3370	2074.
3930	2075.

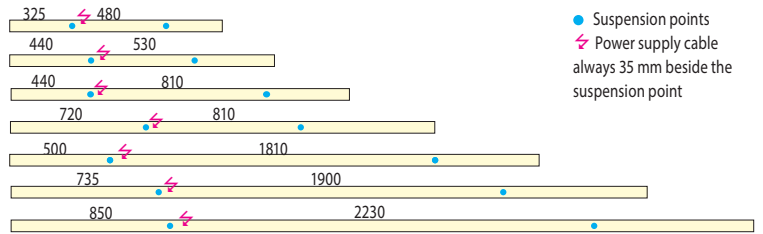

Input voltage 220 - 240 VAC 50/60 Hz, DC Level adjustable

Mounting versions:

OA Pendant luminaire

- Suspended with height adjustable steel cables (1500 mm)
- Power supply integrated in luminaire
- Position of suspension points can be repositioned on-site if necessary
- Connection box optional

