


## PALADIO CONNECT 2 35



Housing: Aluminium profile with integrated microprismatic diffuser and power supply  
Design: SATTLER

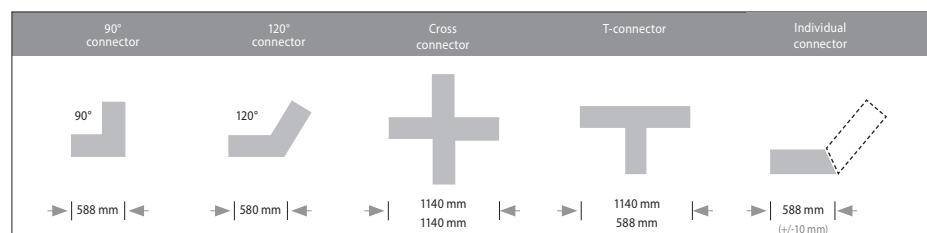


PALADIO CONNECT elements are connectors for the PALADIO PRISM, LENS and TRACK system luminaire series. They make it possible to create complex structures within the respective series or between PRISM, LENS and TRACK series. Connectors for PALADIO LENS and TRACK system are always directly and indirectly applied with blind covers. PALADIO PRISM connectors are functional and contain their own 230V power supply. All connectors can, however, only be operated with a complete system.

separate specification sheet for PALADIO  
CONNECT 2 35 BLIND

		L x W x H mm	Wattage direct	Lumen	Weight <sup>2)</sup> kg	Item No.	Mounting version	Colour	LED direct		LED indirect		Dimming	Power supply cable
Connectors	90° connector	588 x 588 x 70	20	2.080	3,6	2545.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.	
	120° connector	580 x 580 x 70	20	2.080	3,6	2546.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.	
	Cross connector	1140 x 1140 x 70	40	4.160	5,9	2547.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.	
	T-connector	1140 x 588 x 70	30	3.120	4,7	2548.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.	
	Individual connector	588 x 588 x 70 (+/- 10 mm)	20	2.080		2549.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.	

CONNECT elements for PALADIO system luminaires cannot be operated separately. There is always the necessity for a connection to a system luminaire of the PALADIO series PRISM, LENS or TRACK.

### Mounting version



Finish		Optional				X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.
Standard	66 bronze anodised		60 silver anodised	62 black anodised	65 champ. gold anodised	X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.

LED direct		LED	PALADIO PRISM										
		Standard:	Neutral-white	4000 K	X X X X.	X X.	X X.	40.	X X.	X X.	X X.	X X.	X X X.
			Warm-white	3000 K	X X X X.	X X.	X X.	30.	X X.	X X.	X X.	X X.	X X X.
			Extra Warm-white	2700 K	X X X X.	X X.	X X.	27.	X X.	X X.	X X.	X X.	X X X.
			Tunable white	2700-6500K	X X X X.	X X.	X X.	80.	X X.	X X.	X X.	X X.	X X X.
		DIFFUSER	PALADIO PRISM										
			Microprism symmetrical, 65° beam angle		X X X X.	X X.	X X.	10.	00.	00.	X X.	X X X.	

The indirect side is always covered with blind covers

Dimming	Standard:	Dimmable to 1% via DALI-2, switch Dim	X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	06.	X X X.
Power supply cable	No power supply cable necessary, wiring with system luminaire through 220-240VAC/DALI connecting terminal.		X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X.	000.

Pieces:

Complete order number:

---	--	--	--	--	00.	00.	06.	000.
-----	----	----	----	----	-----	-----	-----	------

Input voltage 220-240 VAC 50-60 Hz



Handcrafted in  
Germany,  
certified quality



Protective rating  
of luminaire



Light distribution  
direct



Protection class I




Luminaires are suitable for mounting  
on ordinary flammable materials, which  
have an inflammation point of at least  
200°C / 392°F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F and a light temperature of 4000K. 2) Weight of luminaire including power supply


## illuminated connectors

### Mounting versions


#### OA - Pendant luminaire

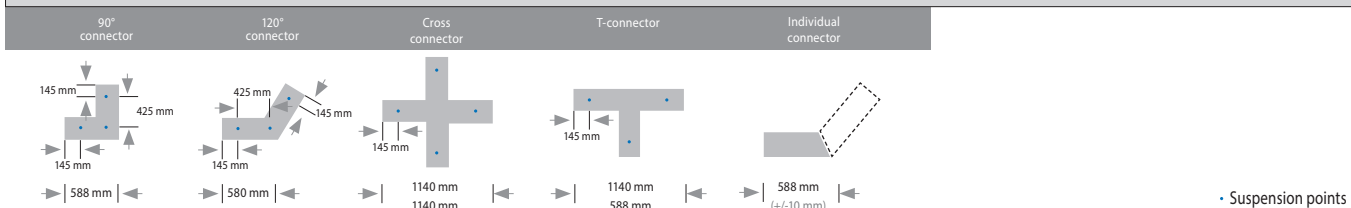

#### OP - Surface mounted luminaire

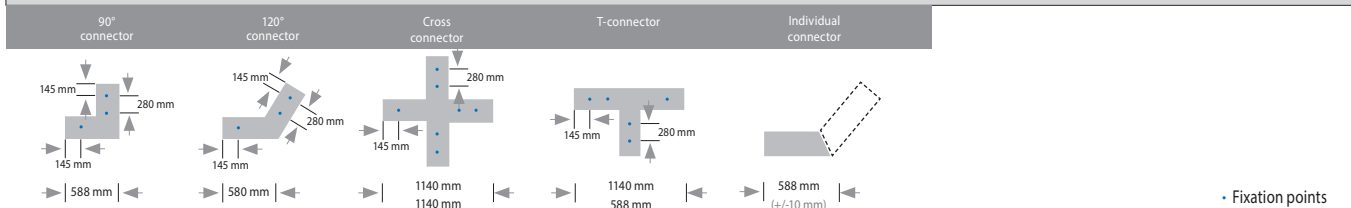

#### OV - Recessed luminaire with frame

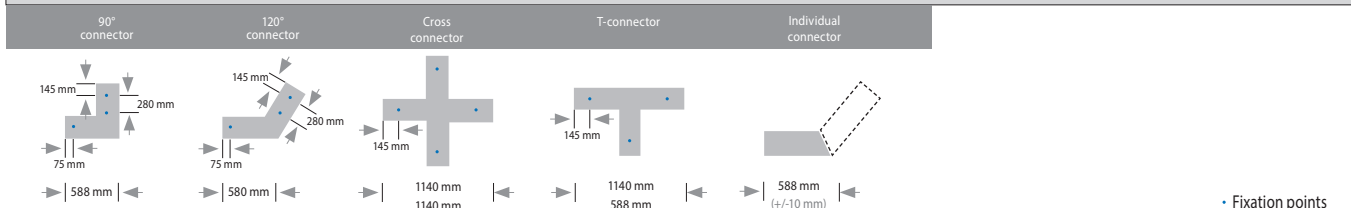


# PALADIO CONNECT 2 35

# SATTLER

## ORDER EXAMPLE

The diverse components of the PALADIO series give you the possibility to create your individually designed PALADIO SYSTEM LUMINAIRE. The illustration below shows only one of the various possibilities offered by the PALADIO System.

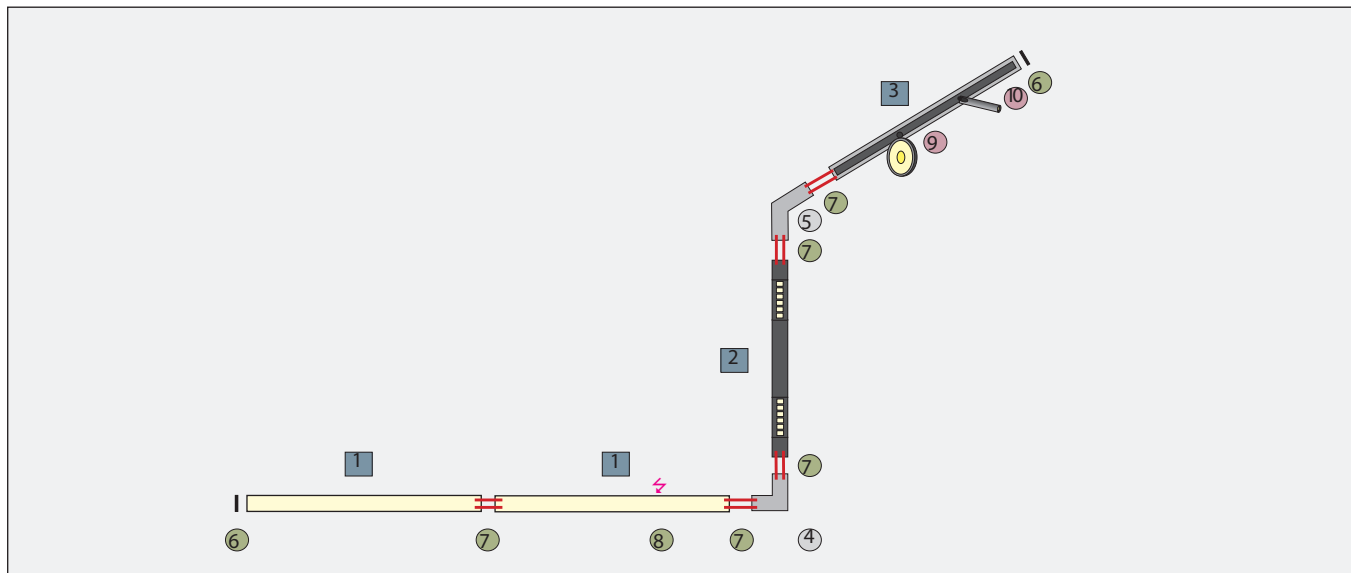

Luminaires	Connectors	Accessories	Light elements (TRACK)
<ul style="list-style-type: none"> <li>1 PRISM 1130 mm</li> <li>2 LENS 1410 mm</li> <li>3 TRACK 1410 mm</li> </ul>	<ul style="list-style-type: none"> <li>4 90° connector</li> <li>5 120° connector</li> </ul>	<ul style="list-style-type: none"> <li>6 End caps</li> <li>7 Connector Set (included)</li> <li>8 Power supply cable</li> </ul>	<ul style="list-style-type: none"> <li>9 AVVENI SPOT</li> <li>10 FINO SPOT 2</li> </ul>