


## PALADIO CONNECT 2 54



Housing: Aluminium profile with integrated microprismatic diffuser and power supply  
Design: SATTLER

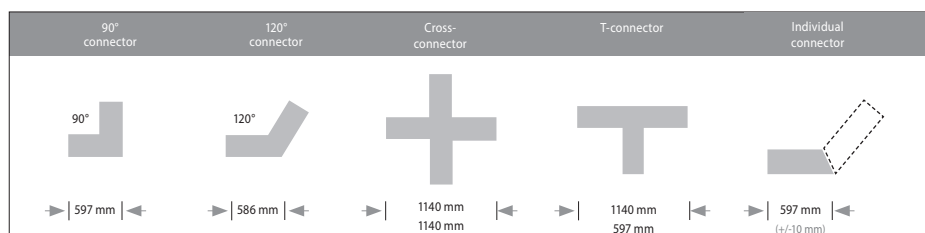


PALADIO CONNECT elements are connectors for the PALADIO PRISM and LENS system luminaire series. They make it possible to create complex structures within the respective series or between PRISM and LENS series. Connectors for PALADIO LENS system are always directly and indirectly applied with blind covers. PALADIO PRISM connectors are functional and contain their own 230V power supply. All connectors can, however, only be operated with a complete system.

separate specification sheet for PALADIO  
CONNECT 2 54 BLIND

		L x W x H mm	Wattage direct	Lumen	Weight <sup>2</sup> kg	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable
Connectors	90° connector	597 x 597 x 87	20	2.304	4,8	2535.	X X.	X X.	X X.	X X.	X X.	X X X.
	120° connector	586 x 586 x 87	20	2.304	4,8	2536.	X X.	X X.	X X.	X X.	X X.	X X X.
	Cross-connector	1140 x 1140 x 87	40	4.608	8,2	2537.	X X.	X X.	X X.	X X.	X X.	X X X.
	T-connector	1140 x 597 x 87	30	3.456	6,4	2538.	X X.	X X.	X X.	X X.	X X.	X X X.
	Individual connector	597 x 597 x 87 (+/- 10 mm)	20	2.304		2539.	X X.	X X.	X X.	X X.	X X.	X X X.

CONNECT elements for PALADIO system luminaires cannot be operated separately. There is always the necessity for a connection to a system luminaire of the PALADIO series PRISM or LENS.


### Mounting version



Pendant



Surface mounted



Recessed with frame

X X X X.

--.

X X.

X X.

X X.

X X.

X X.

X X.

X X X.

### Finish



66  
bronze  
anodised

Optional



60  
silver  
anodised



62  
black  
anodised



65  
champ. gold  
anodised

X X X X.

X X.

--.

X X.

X X.

X X.

X X.

X X.

X X X.

### LED direct



LED

Standard:

PALADIO PRISM

Neutral-white

4000 K

X X X X.

X X.

X X.

40.

X X.

X X.

X X.

X X.

X X X.

Warm-white

3000 K

X X X X.

X X.

X X.

30.

X X.

X X.

X X.

X X.

X X X.

Extra Warm-white

2700 K

X X X X.

X X.

X X.

27.

X X.

X X.

X X.

X X.

X X X.

Tunable white

2700-6500 K

X X X X.

X X.

X X.

80.

X X.

X X.

X X.

X X.

X X X.

DIFFUSER

PALADIO PRISM:

Microprism symmetrical, 65° beam angle

X X X X.

X X.

X X.

10.

00.

00.

X X.

X X X.

The indirect side is always covered with blind covers

### Dimming

Standard:

Dimmable to 1% via DALI-2, switch Dim

X X X X.

X X.

X X.

X X.

X X.

X X.

06.

X X X.

### Power supply cable

No power supply cable necessary, wiring with system luminaire through 220-240 VAC/DALI connecting terminal.

X X X X.

X X.

X X.

X X.

X X.

X X.

X X.

000.

Pieces:



Complete order number:



----

--.

--.

--.

--.

00.

00.

06.

000.

Input voltage 220-240 VAC 50-60 Hz



Handcrafted in  
Germany,  
certified quality



Protective rating  
of luminaire



Light distribution  
direct



Protection class I



Luminaires are suitable for mounting  
on ordinary flammable materials,  
which have an inflammation point of  
at least 200° C. / 392° F.


www.sattler-lighting.com

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F and a light temperature of 4000K. Direct for microprism symmetrical 65°, direct for opal diffuser.


## illuminated connectors

### Mounting versions


#### OA - Pendant luminaire

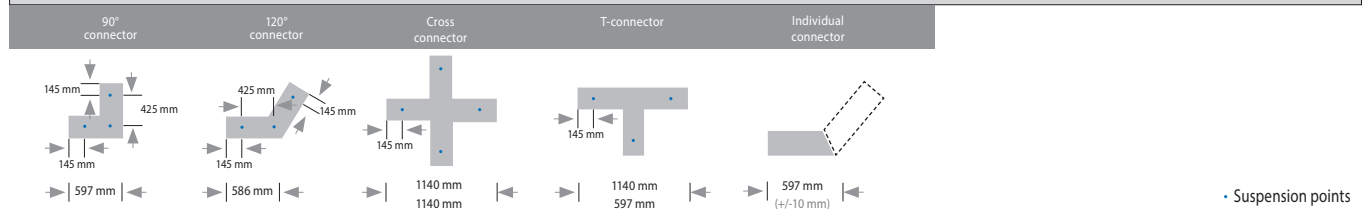

#### OP - Surface mounted luminaire

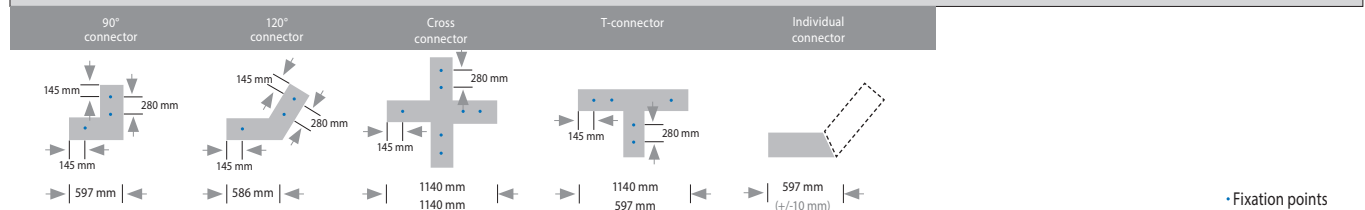


#### OV - Recessed luminaire with frame

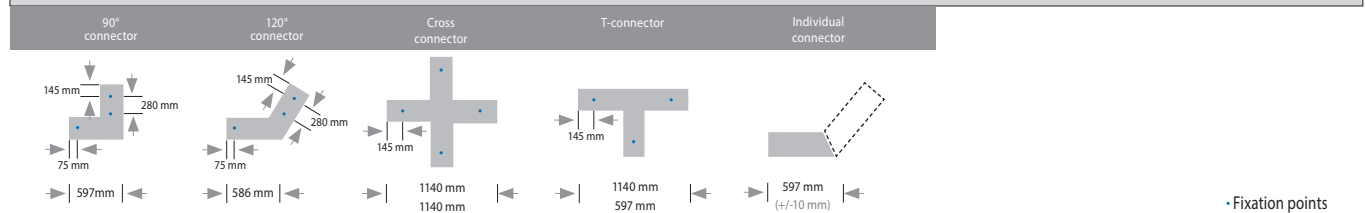

ORDER EXAMPLE

The diverse components of the PALADIO series give you the possibility to create your individually designed PALADIO SYSTEM LUMINAIRE. The illustration below shows only one of the various possibilities offered by the PALADIO System.

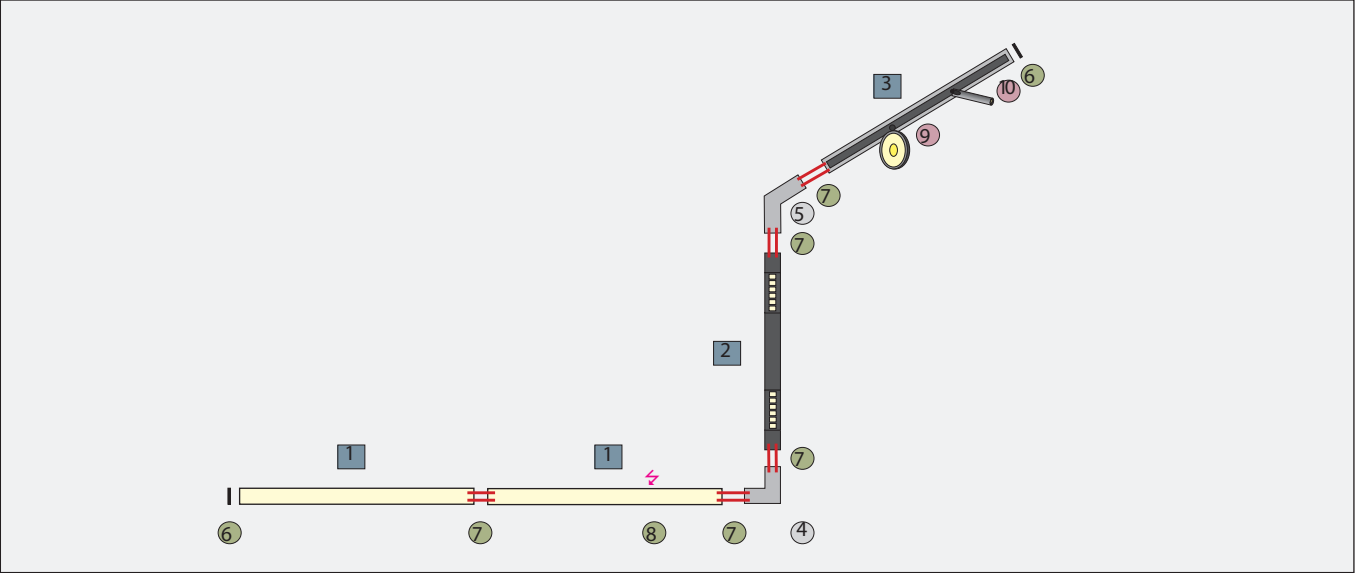

Luminaires	Connectors	Accessories	Light elements (TRACK)
<div><div>1</div>PRISM 1130 mm</div> <div><div>2</div>LENS 1410 mm</div> <div><div>3</div>TRACK 1410 mm</div>	<div><div>4</div>90° connector</div> <div><div>5</div>120° connector</div>	<div><div>6</div>End caps</div> <div><div>7</div>Connector Set (included)</div> <div><div>8</div>Power supply cable</div>	<div><div>9</div>AVVENI SPOT</div> <div><div>10</div>FINO SPOT 2</div>