


PALITO


FLOOR

Housing: Curved aluminium housing with integrated lens reflector and metal stand.

Design: Ulrich Sattler | Michael Schmidt, Code2design

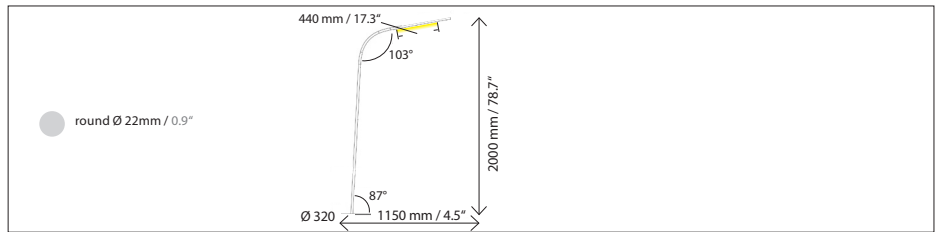

Size: Ø / H mm	Inches	LED Watt direct/indirect	Lumen ¹⁾ direct/indirect	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes Ø 22 / H 2006 mm	Ø 0.9 / H 78.9"	10/4	1385/180	5,0 / 11.0	1548.	X X.	X X.	X X.	X X.	X X X.	X
LED	Standard: Tunable white	2700-6500 K		X X X.	80.	X X.	80.	X X.	X X X.	X	
CRI > 90 UGR < 17 Mac Adam 3 SELV L80 B10 70.000 h											
Dimming	Standard: Push button for dimming	X X X.	X X.	07.	X X.	X X.	X X X.	X			
Finish	Standard: 66 bronze anodised brushed	Optional: 62 black anodised brushed	65 champ. gold anodised brushed	X X X.	X X.	X X.	X X.	X X X.	X		
Power supply cable	Z 80 PVC Black	X X X.	X X.	X X.	X X.	X X.	Z80.	X			
Mounting version	Floor Light including 1900mm/74" connection cable (black) with power adapter pluggable on the lamp included country-specific plug	X X X.	X X.	X X.	X X.	X X.	X X X.	N			



Stand same colour as selected finish (60,65,66) black anodised (10 black fine textured)

1548.	80.	---	80.	---	Z80.	N
-------	-----	-----	-----	-----	------	---

Complete order number

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

