


ELLIPSE

Housing: Aluminium profile with integrated or L-shaped opal diffuser
 Design: SATTLER

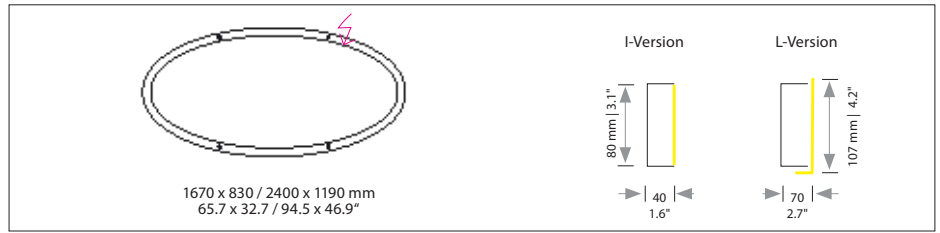

Sizes	Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
I-Version	1670 x 830 x 80	65.7 x 32.7 x 3.1	81	5.422	17 / 37.5	873.	X X.	X X.	X X.	X X.	X X X.	X
	2400 x 1190 x 80	94.5 x 46.9 x 3.1	116	7.990	18 / 39.7	885.	X X.	X X.	X X.	X X.	X X X.	X
L-Version	1670 x 830 x 107	65.7 x 32.7 x 4.2	81	5.847	17 / 37.5	872.	X X.	X X.	X X.	X X.	X X X.	X
	2400 x 1190 x 107	94.5 x 46.9 x 4.2	116	8.615	18 / 39.7	884.	X X.	X X.	X X.	X X.	X X X.	X

LED	Standard:	Neutral-white	4000 K	X X X.	40.	X X.	X X.	X X.	X X.	X X X.	X
CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h		Optional:	Warm-white	3000 K	X X X.	30.	X X.	X X.	X X.	X X X.	X
		Extra warm-white	2700 K	X X X.	27.	X X.	X X.	X X.	X X X.	X	
		Tunable white*	2700 - 6500 K	X X X.	80.	X X.	X X.	X X.	X X X.	X	
		RGB colour control*		X X X.	60.	X X.	00.	X X.	X X X.	X	
		RGB + Neutral-White*	4000 K	X X X.	60.	X X.	40.	X X.	X X X.	X	
		* (only in combination with dimming DALI, CASAMBI)									
		Combinations up to two stripes of LED possible									

Dimming	Standard:	Without Dimmer	X X X.	X X.	01.	00.	X X.	X X X.	X
	Optional:	0 - 10 V	X X X.	X X.	51.	00.	X X.	X X X.	X
	DALI		X X X.	X X.	61.	00.	X X.	X X X.	X
	CASAMBI		X X X.	X X.	81.	00.	X X.	X X X.	X


Finish	Standard:	Optional (Powder coated):	Optional (Premium):	X X X.	X X.	X X.	X X.	X X.	X X X.	X					
	12 white, powder coated, similar RAL 9003	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	32* crocodile black	33 sand silver fine textured	34 bronze satined	35 gold	36 brass	37 bronze fine textured	38 copper	22 aluminium polished	27 brush-finished aluminium	44 wood veneer, white borders	XX Custom finish
	*finish No. 32 crocodile black only suitable for L-Version														

Power supply cable	Standard:	Optional:	X X X.	X X.	X X.	X X.	X X.	X X.	X X X.	X
	Z 70 Silver	Z 71 white	Z 72 grey	Z 73 black	Z 74 orange	Z 75 red	Z 76 green	000 Without power cable	Current-carrying F, R, T, K	

Handcrafted in Germany, certified quality
 ETL Intertek
 Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08
 IP 20 Protective rating of luminaire
 Light distribution inwards
 Protection class III: only suitable for very low voltage supply (<50V)
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

ELLIPSE

Housing: Aluminium profile with integrated or L-shaped opal diffuser
 Design: SATTLER

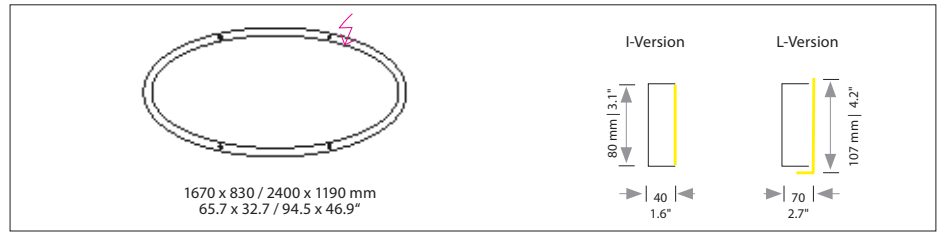

Mounting Version

4-point suspension with external power supply unit in suspended ceiling	4-point suspension with external power supply unit in separate canopy	suspension through canopy	4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB.	Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.	Suspension with pendant canopy PB 375 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"
Suspension with pendant canopy PB 375 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.	Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling	Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy	Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.		

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".
 S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension 1670 x 830 => 550 mm / 21.6", 2399 x 1190 => 750 mm / 29.5"

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118"; Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

Complete order number


Power supply units: (1 LED stripe)		For use with Mounting version	Protective rating
Type / Size mm / inch	L x W x H		
DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A,G,R,K	IP 20

Canopy: (1 LED stripe)		For use with Mounting version	Protective rating
Type / Size mm / inch	Ø cover plate / body / H		
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (size 1670x830)	IP 20
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (size 2400x1190)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Optional



CASAMBI wall-switch 207. 00. 00. 00. 12. (white)
 207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

Power cable cover plate for mounting version A 200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.

--	--	--	--	--	--