



GIRATA Horizontal

Housing: Aluminium profile bent inwards 45°. Integrated opal diffuser
Design: MARKUS BISCHOF

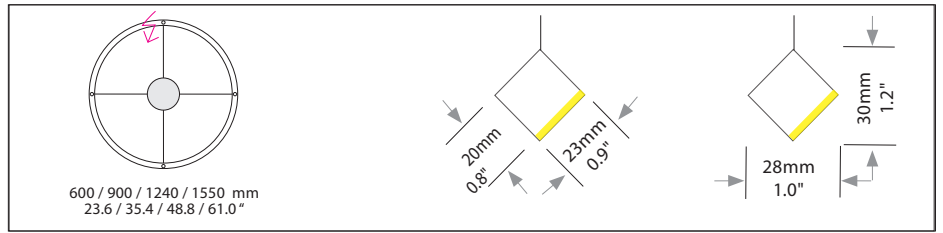

Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Ø 600 mm	23.6"	32	1.893	3.0 / 6.6	895.	XX.	XX.	XX.	XX.	XXX.	X
Ø 900 mm	35.4"	54	3.179	3.5 / 7.7	896.	XX.	XX.	XX.	XX.	XXX.	X
Ø 1240 mm	48.8"	70	4.109	5.0 / 11.0	897.	XX.	XX.	XX.	XX.	XXX.	X
Ø 1550 mm	61.0"	89	5.186	5.5 / 12.1	898.	XX.	XX.	XX.	XX.	XXX.	X
LED <small>CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h</small>		Standard: Warm-white	3000 K		XXX.	30.	XX.	XX.	XX.	XXX.	X
		Optional: Neutral-white Extra warm-white	4000 K 2700 K		XXX. XXX.	40. 27.	XX. XX.	XX. XX.	XX. XX.	XXX. XXX.	X X
Dimming		Standard: Without Dimmer			XXX.	XX.	01.	00.	XX.	XXX.	X
		Optional: 0 - 10 V DALI CASAMBI			XXX. XXX. XXX.	XX. XX. XX.	51. 61. 81.	00. 00. 00.	XX. XX. XX.	XXX. XXX. XXX.	X X X
Finish	Standard: 12 white, powder coated, similar RAL 9003	Optional (Powder coated): 11 white, similar RAL 9010 10 black fine textured 30 anthracite fine textured 33 sand silver fine textured 34 bronze satined 35 gold 36 brass 37 bronze fine textured 38 copper	Optional (Premium): 22 aluminium polished 27 brush-finished aluminium XX Custom finish		XXX.	XX.	XX.	XX.	---	XXX.	X
Power supply cable	Standard: Without power cable 000 Current-carrying F, R, T, K	Optional: Z 70 Silver Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 red Z 76 green			XXX.	XX.	XX.	XX.	XX.	---	X

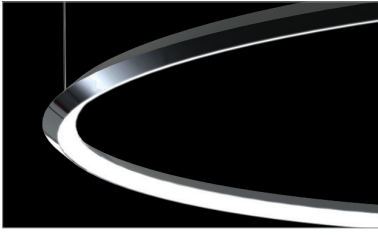

Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution





Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

GIRATA Horizontal


Housing: Aluminium profile bent inwards 45°. Integrated opal diffuser
Design: MARKUS BISCHOF

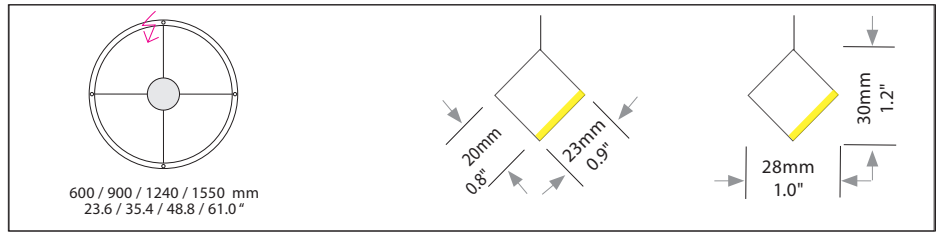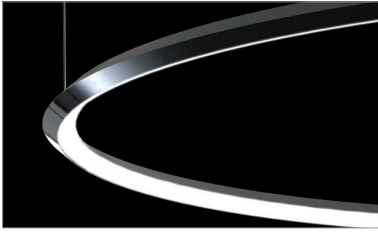


Mounting version




up to Ø 1550 mm
4-point suspension
with external power supply
unit in suspended ceiling




up to Ø 1550 mm
4-point suspension
with external power supply
unit in separate canopy




suspension through canopy




4 current-carrying steel
cables. Not in combination
with RGB




Suspension with current-
carrying steel cables and
cavity wall box. Not in
combination with RGB.



Suspension with pendant
canopy PB 375
and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"



Suspension with pendant canopy
PB 375 and current-carrying steel
cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Suspension point as
clamping unit with 4 cables
and remote technical unit in
suspended ceiling.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

A, B, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"

Power supply unit:		For use with	Protective
Type / Size mm / inch	L x W x H	Mounting version	rating
DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A, R, K	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Canopy:		For use with	Protective
Type / Size mm / inch	Ø cover plate / body / H	Mounting version	rating
DB 230	Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F (up to Ø 900 mm)	IP 20
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F (up to Ø 1550 mm)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Ø body 90 mm / 3.5"

Optional




CASAMBI wall-switch

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in
Germany,
certified quality



Conforms to
UL-STD 1598
Certified to
CSA-STD C22.2
No.250.0-08



Protective rating
of luminaire



Direct
light distribution



Protection class III:
only suitable for very low
voltage supply (<50V)



Luminaires are suitable for mounting
on ordinary flammable materials,
which have an inflammation point of
at least 200° C. / 392° F.