











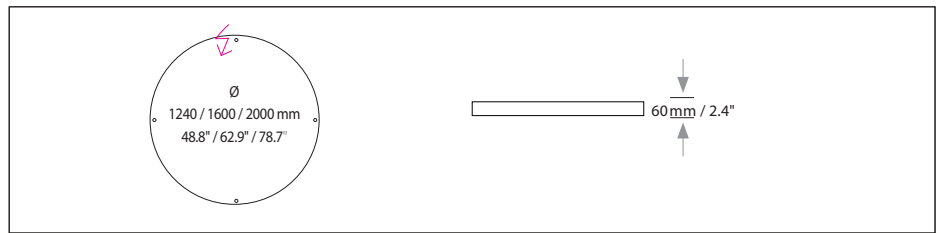

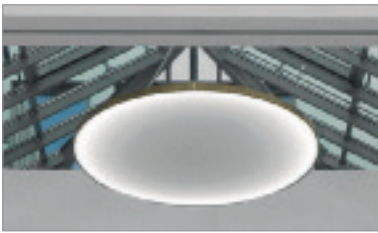













HIGHMOON FLAT

Housing: Aluminium housing with translucent foil.
Level of illumination slightly decreasing towards centre.

Design: SATTLER



	Size: Ø x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version	
Sizes	Ø 1240 x 60	48.1 x 2.4"	89	6.859	6 / 13.2	274.	x x.	x x.	x x.	x x.	x x x.	x	
	Ø 1600 x 60	62.9 x 2.4"	117	9.117	8 / 17.6	278.	x x.	x x.	x x.	x x.	x x x.	x	
	Ø 2000 x 60	78.7 x 2.4"	148	11.600	11 / 24.2	280.	x x.	x x.	x x.	x x.	x x x.	x	
LED		Standard: Neutral-white	4000 K			x x x.	40.	x x.	x x.	x x.	x x x.	x	
CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h		Optional: Warm-white	3000 K			x x x.	30.	x x.	x x.	x x.	x x x.	x	
		Extra warm-white	2700 K			x x x.	27.	x x.	x x.	x x.	x x x.	x	
		Tunable white*	2700 - 6500 K			x x x.	80.	x x.	x x.	x x.	x x x.	x	
		RGB colour control*				x x x.	60.	x x.	00.	x x.	x x x.	x	
		*(only in combination with dimming DALI, CASAMBI) Combinations up to two stripes of LED possible											
Dimming		Standard: Without Dimmer				x x x.	x x.	01.	00.	x x.	x x x.	x	
		Optional: 0 - 10 V				x x x.	x x.	51.	00.	x x.	x x x.	x	
		DALI				x x x.	x x.	61.	00.	x x.	x x x.	x	
		CASAMBI				x x x.	x x.	81.	00.	x x.	x x x.	x	
Finish		Standard: 12 white, powder coated, similar RAL 9003	Optional (Powder coated):										
													
													
		Optional (Premium):		22 aluminium polished	27 brush-finished aluminium	XX Custom finish		x x x.	x x.	x x.	x x.	- , x x x.	x
Power supply cable		Standard: Z 70 Silver	Optional:										
													
	Z 74 orange			Z 75 red	Z 76 green	x x x.							x x.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution 3-7% indirect




Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F


Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

HIGHMOON FLAT

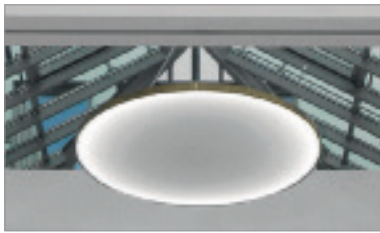


Housing: Aluminium housing with translucent foil.
Level of illumination slightly decreasing towards centre.


Design: SATTLER

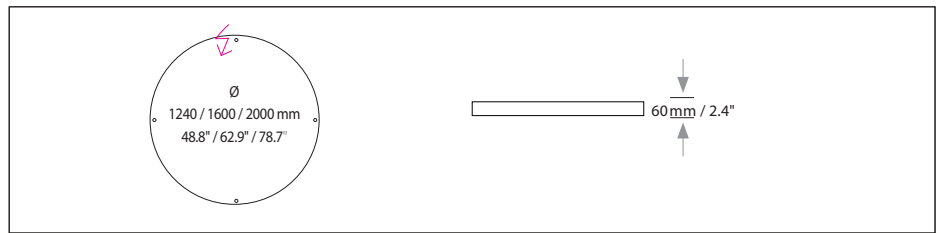


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy



Suspension with pendant canopy PB 375 and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	—

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

E, S = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197"; Version S 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"



---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

Power supply units: (1 LED Stripe)			
Type / Size mm / inch	For use with Mounting version	Protective rating	
DE 1F 363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A, G (Ø 1240, 1600 mm)	IP 20	
DE 2F 363 x 283 x 56 mm / 14.2 x 11.1 x 2.2"	A, G (Ø 2000 mm)	IP 20	

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Canopy:			
Type/Size mm / inch	For use with Mounting version	Protective rating	
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, H (Ø 1240 mm)	IP 20	
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, H (Ø 1600, 2000 mm)	IP 20	
PB 375 Ø 90 H 375 mm / 3.5 x 14.8"	S (up to Ø 1600 mm)	IP 20	
PB 652 Ø 90 H 652 mm / 3.5 x 25.7"	S (Ø 2000 mm)	IP 20	
Colour: 12 white, similar RAL 9003, contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			

Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

Power cable cover plate for mounting version A

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution 3-7% indirect



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.