



PALITO MIKADO

Housing: Pendant light, solid aluminium housing
Design: Ulrich Sattler | Michael Schmidt, Code2design

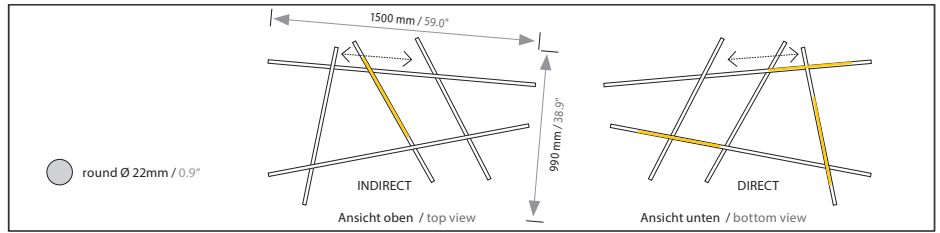

SIZE	Size: L / W / H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	1500 x 990 x 190 mm / 59.0 x 38.9 x 7.4"		58	7040	3.5 / 7.7	1543.	X X.	X X.	X X.	X X.	X X X.	X
LED	 Standard: Warm-white Optional: Neutral-white Extra warm-white		3000 K	X X X.	30.	X X.	30.	X X.	X X X.	X		
			4000 K 2700 K	X X X. X X X.	40. 27.	X X. X X.	40. 27.	X X. X X.	X X X. X X X.	X		
Dimming	 Standard: Without Dimmer Optional: 0 - 10 V DALI CASAMBI			X X X.	X X.	01.	X X.	X X.	X X X.	X		
				X X X. X X X. X X X.	X X. X X. X X.	51. 61. 81.	X X. X X. X X.	X X. X X. X X.	X X X. X X X. X X X.	X X X		
Finish	Standard: 66 bronze anodised brushed Optional: 60 silver anodised brushed 62 black anodised brushed 65 champ. gold anodised brushed			X X X.	X X.	X X.	X X.	X X.	X X X.	X		
				X X X.	X X.	X X.	X X.	X X.	X X X.	X		
Power supply cable	 000 Mounting version F,R,K Current carrying steel cables No power supply Z 80 black, Mounting version A,B,E		Standard:	X X X.	X X.	X X.	X X.	X X.	000.	X		
			Optional:	X X X.	X X.	X X.	X X.	X X.	Z80.	X		

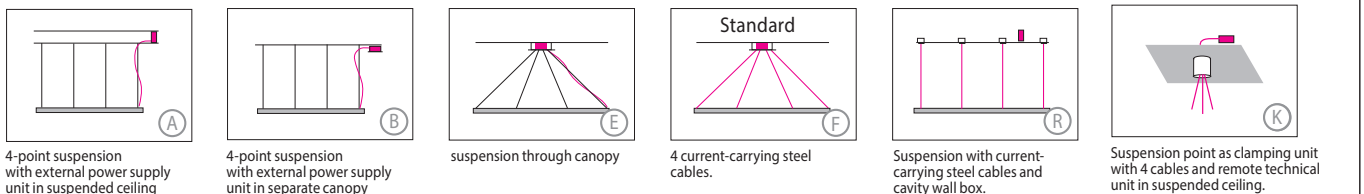

A, B = Distance of external power supply unit to light fixture max. 10m / 394".
E, F, K = Minimum suspension height 0,5m, including steel cable suspension 3000 mm / 118"

 Ø body H 60 mm / 2.3" Ø cover plate	Canopy, Colour: 12 white, similar RAL 9003	
	Type	Size mm / inch Ø cover plate / body DB 290 Ø 290 / 260 mm / 11.4 x 10.2"
 W H L	External power supply units	
	Type	Size mm / inch L W H DE 1F 363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"

X X X.	X X.	X X.	X X.	X X.	X X X.	
--------	------	------	------	------	--------	--

1543.	X X.	X X.	X X.	X X.	X X X.	X
-------	------	------	------	------	--------	---


Complete order number



CASAMBI wall-switch

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10. (black)



Power cable cover plate for mounting version A

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A..

200. 00. 00. 00. 12. (white)

