




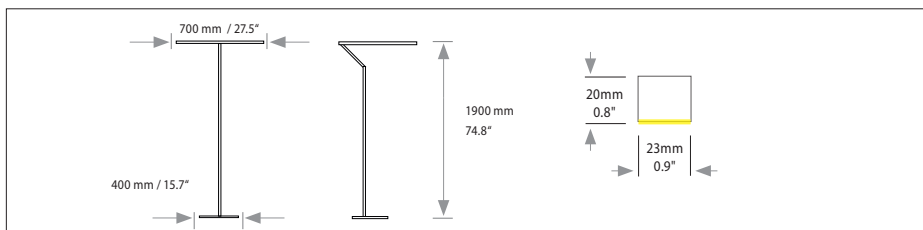



INSOSPESO FLOOR

Housing: Aluminium profile with integrated opal diffuser. Round lamp stand made of glass with satinised sides.

Design: JÜRGEN BECKERT

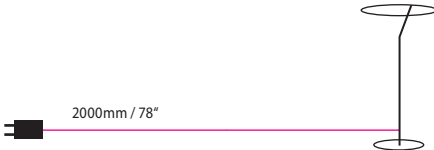

	Size: Ø / H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	Ø 700, H 1900 mm	Ø 27.5 H 74.8"	42	2.478	7 / 15.4	597.	x x .	x x .	x x .	x x .	x x x .	x
LED		Standard: Warm-white	3000 K	x x x .	30.	x x .	x x .	x x .	x x x .	x		
		Optional: Neutral-white Extra warm-white	4000 K 2700 K	x x x . x x x .	40. 27.	x x . x x .	x x . x x .	x x . x x .	x x x . x x x .	x x		
CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h												
Dimming		Standard: Touchdimmer		x x x .	x x .	21.	00.	x x .	x x x .	x		
Finish		Standard: 12 white, powder coated, similar RAL 9003	Optional (Powder coated): 11 white, similar RAL 9010 10 black fine textured 30 anthracite fine textured 33 sand silver fine textured 34 bronze satined 35 gold 36 brass 37 bronze fine textured 38 copper	Optional (Premium): 22 aluminium polished XX Custom finish								
Power supply cable		Z 80 PVC cable black 2000 mm / 78"										



Round lamp stand made of glass with satinised side.



597.	--.	21.	00.	--.	Z80.	N
------	-----	-----	-----	-----	------	---

Complete order number

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.