


SOFT DELTA LIGHT + ACOUSTIC

Housing: Aluminium profile with integrated opal diffuser and fabric covering as a light and acoustic diffuser.

Design: SATTLER

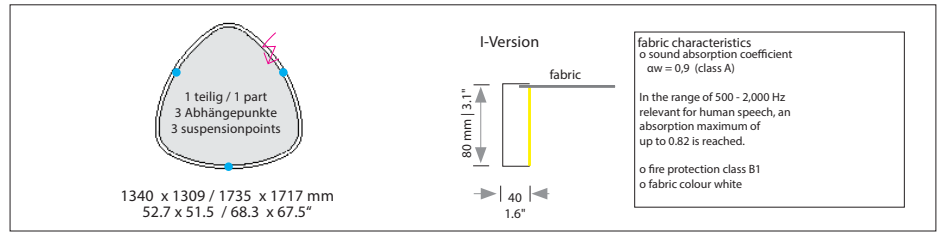

	Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version		
Sizes	1340 x 1309 x 80	52.7 x 51.5 x 3.1	83	5.427	9 / 20.0	850.	x x.	x x.	x x.	x x.	x x x.	x		
	1735 x 1717 x 80	68.3 x 67.5 x 3.1	106	7.003	12 / 26.5	862.	x x.	x x.	x x.	x x.	x x x.	x		
LED	<p>Standard: Neutral-white 4000 K</p> <p>Optional: Warm-white 3000 K Extra warm-white 2700 K Tunable white* 2700 - 6500 K RGB colour control* RGB + Neutral-White* 4000 K</p> <p>* (only in combination with dimming DALI, CASAMBI) Combinations up to two stripes of LED possible</p>													
Dimming	<p>Standard: Without Dimmer</p> <p>Optional: 0 - 10 V DALI CASAMBI</p>													
Finish	<p>Standard:</p> <p>12 white, powder coated, similar RAL 9003</p> <p>Optional (Powder coated):</p> <p>Optional (Premium):</p>													
Power supply cable	<p>Standard:</p> <p>Z 70 Silver</p> <p>Optional:</p> <p>Z 71 white</p> <p>Z 72 grey</p> <p>Z 73 black</p> <p>Z 74 orange</p> <p>Z 75 red</p> <p>Z 76 green</p> <p>Without power cable</p> <p>000 Current-carrying F, R, T, K</p>													



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards



Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

SOFT DELTA LIGHT + ACOUSTIC

Housing: Aluminium profile with integrated opal diffuser and fabric covering as a light and acoustic diffuser.
Design: SATTLER

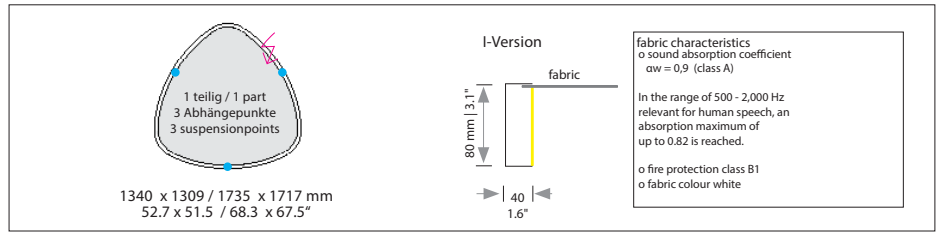

Mounting Version

3-point suspension with external power supply unit in suspended ceiling	3-point suspension with external power supply unit in separate canopy	3 steel cables suspension through canopy	3 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB	Suspension with 3 current-carrying steel cables and cavity wall box. Not in connection with RGB.	Suspension with pendant canopy PB 375 and 3 steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"
Suspension with pendant canopy PB 375 and 3 current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.	Direct ceiling mounting 3 points (white) 50mm / 1.9" with external power supply unit in	Direct ceiling mounting 3 points (white) 50mm / 1.9" with external power supply unit in	Suspension point as clamping unit with 3 current-carrying cables and remote technical unit in suspended ceiling.		

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".
S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture
Including steel cable suspension 5000mm / 197"; Version S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"; Version F, R 3000 mm / 118"

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

Complete order number

Power supply unit: (I LED Stripe)		For use with Mounting version	Protective rating
Type / Size mm / inch	L x W x H		
DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A,G,R,K	IP 20

Canopy: (I LED Stripe)		For use with Mounting version	Protective rating
Type / Size mm / inch	Ø cover plate / body / H		
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (size 1340x1309)	IP 20
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (size 1735x1717)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Optional

	CASAMBI wall-switch	207. 00. 00. 00. 12. (white) 207. 00. 00. 00. 10 (black)
Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.		
	Power cable cover plate for mounting version A	200. 00. 00. 00. 12 (white)
Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.		

	Handcrafted in Germany, certified quality		Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08		Protective rating of luminaire		Light distribution inwards		Protection class III: only suitable for very low voltage supply (<50V)		Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F
--	---	--	--	--	--------------------------------	--	----------------------------	--	--	--	--