








## SOFT DELTA

Housing: Aluminium profile with integrated or L-shaped opal diffuser  
Design: SATTLER

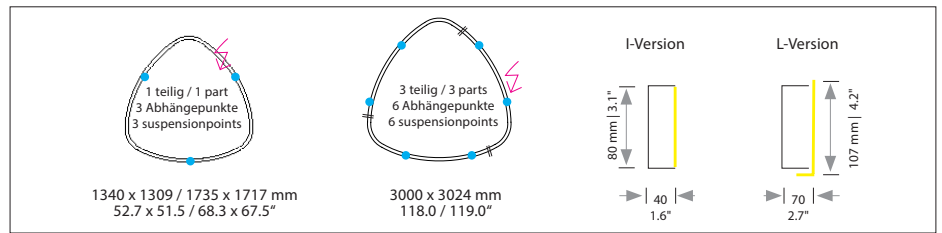

Sizes	Size: L x W x H mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version					
I-Version	1340 x 1309 x 80	52.7 x 51.5 x 3.1	83	5.624	9 / 20.0	849.	X X.	X X.	X X.	X X.	X X X.	X					
	1735 x 1717 x 80	68.3 x 67.5 x 3.1	107	7.297	12 / 26.5	861.	X X.	X X.	X X.	X X.	X X X.	X					
	3024 x 3000 x 80	119.0 x 118.1 x 3.1	189	13.226	27 / 59.5	863.	X X.	X X.	X X.	X X.	X X X.	X					
L-Version	1340 x 1309 x 107	52.7 x 51.5 x 4.2	83	5.944	14 / 30.0	848.	X X.	X X.	X X.	X X.	X X X.	X					
	1735 x 1717 x 107	68.3 x 67.5 x 4.2	107	7.623	17 / 37.5	860.	X X.	X X.	X X.	X X.	X X X.	X					
LED		Standard: Neutral-white	4000 K			X X X.	40.	X X.	X X.	X X.	X X X.	X					
CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h		Optional: Warm-white	3000 K			X X X.	30.	X X.	X X.	X X.	X X X.	X					
		Extra warm-white	2700 K			X X X.	27.	X X.	X X.	X X.	X X X.	X					
		Tunable white*	2700 - 6500 K			X X X.	80.	X X.	X X.	X X.	X X X.	X					
		RGB colour control*				X X X.	60.	X X.	00.	X X.	X X X.	X					
		RGB + Neutral-White*	4000 K			X X X.	60.	X X.	40.	X X.	X X X.	X					
		*(only in combination with dimming DALI, CASAMBI) Combinations up to two stripes of LED possible															
Dimming		Standard: Without Dimmer				X X X.	X X.	01.	00.	X X.	X X X.	X					
		Optional: 0 - 10 V				X X X.	X X.	51.	00.	X X.	X X X.	X					
		DALI				X X X.	X X.	61.	00.	X X.	X X X.	X					
		CASAMBI				X X X.	X X.	81.	00.	X X.	X X X.	X					
Finish		Standard: 12 white, powder coated, similar RAL 9003	Optional (Powder coated): 11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	32* crocodile black	33 sand silver fine textured										
		34 bronze satined	35 gold	36 brass	37 bronze fine textured	38 copper											
		22 aluminium polished	27 brush-finished aluminium	44 wood veneer, white borders	XX Custom finish	X X X.	X X.						X X.	X X.	- .	X X X.	X
		*finish No. 32 crocodile black only suitable for L-Version															
Power supply cable		Standard: Z 70 Silver	Optional: Z 71 white	Z 72 grey	Z 73 black		000 Current-carrying F, R, T, K										
		Z 74 orange	Z 75 red	Z 76 green													
					X X X.								X X.	X X.	X X.	X X.	- - - .



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards




Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

## SOFT DELTA


Housing: Aluminium profile with integrated or L-shaped opal diffuser  
Design: SATTLER

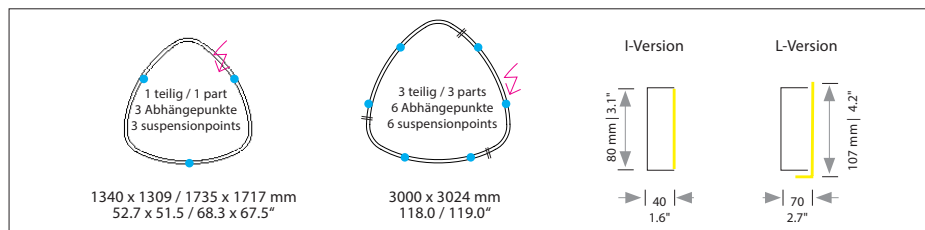


### Mounting Version




3/6-point suspension with external power supply unit in suspended ceiling




3/6-point suspension with external power supply unit in separate canopy




Up to 1735 x 1717 3 steel cables, suspension through canopy




Up to 1735 x 1717 3 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB.




Up to 1735 x 1717 3 current-carrying steel cables and cavity wall box. Not in combination with RGB.




Suspension with pendant canopy PB 375 and 3/6 steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"




Suspension with pendant canopy PB 375 and 3/6 current-carrying steel cables.  
(a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"  
Not in combination with RGB.



Direct ceiling mounting 3/6 points (white) 50mm / 1.9" with external power supply unit in



Direct ceiling mounting 3/6 points (white) 50mm / 1.9" with external power supply unit in



Up to 1735 x 1717. Suspension point as clamping unit with 3 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197"; Version S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"; Version F, R 3000 mm / 118"



---	---	---	---	---	---	-
-----	-----	-----	-----	-----	-----	---

Complete order number


Power supply units: (1 LED stripe)			
	Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A,G,R,K	IP 20
DE 2F	363 x 283 x 56 mm / 14.2 x 11.1 x 2.2"	A,G (size 3000 x 3024mm)	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Canopy: (1 LED stripe)			
	Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (size 1340 x 1309)	IP 20
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (size 1735 x 1717) (size 3000 x 3024)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes  
USA/Canada: Canopy mounts to 4" octagonal junction box.

### Optional



#### CASAMBI wall-switch

207. 00. 00. 00. 12. (white)  
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

#### Power cable cover plate for mounting version A

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598  
Certified to CSA-STD C22.2  
No.250.0-08



Protective rating of luminaire



Light distribution inwards



Protection class III:  
only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.