




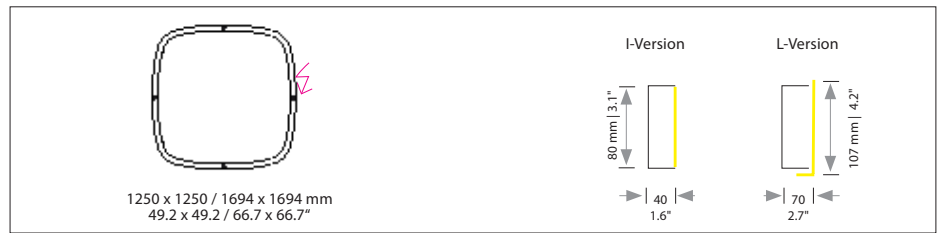






SOFT QUADRA

Housing: Aluminium profile, integrated (I) or L-shaped opal diffuser (L)
Design: SATTLER



Sizes	Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version				
I-Version	1250 x 1250 x 80	49.2 x 49.2 x 3.1	88	5.873	15 / 33.1	801.	x x.	x x.	x x.	x x.	x x x.	x				
	1694 x 1694 x 80	66.7 x 66.7 x 3.1	118	7.951	17 / 37.5	813.	x x.	x x.	x x.	x x.	x x x.	x				
L-Version	1250 x 1250 x 107	49.2 x 49.2 x 4.2	88	6.336	15 / 33.1	800.	x x.	x x.	x x.	x x.	x x x.	x				
	1694 x 1694 x 107	66.7 x 66.7 x 4.2	118	8.556	17 / 37.5	812.	x x.	x x.	x x.	x x.	x x x.	x				
LED		Standard: Neutral-white	4000 K			x x x.	40.	x x.	x x.	x x.	x x x.	x				
CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h		Optional: Warm-white	3000 K			x x x.	30.	x x.	x x.	x x.	x x x.	x				
		Extra warm-white	2700 K			x x x.	27.	x x.	x x.	x x.	x x x.	x				
		Tunable white*	2700 - 6500 K			x x x.	80.	x x.	x x.	x x.	x x x.	x				
		RGB colour control*				x x x.	60.	x x.	00.	x x.	x x x.	x				
		RGB + Neutral-White*	4000 K			x x x.	60.	x x.	40.	x x.	x x x.	x				
		*(only in combination with dimming DALI, CASAMBI) Combinations up to two stripes of LED possible														
Dimming		Standard: Without Dimmer				x x x.	x x.	01.	00.	x x.	x x x.	x				
		Optional: 0 - 10 V				x x x.	x x.	51.	00.	x x.	x x x.	x				
		DALI				x x x.	x x.	61.	00.	x x.	x x x.	x				
		CASAMBI				x x x.	x x.	81.	00.	x x.	x x x.	x				
Finish		Standard: 12 white, powder coated, similar RAL 9003	Optional (Powder coated): 11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	32* crocodile black	33 sand silver fine textured		XX Custom finish	x x x.	x x.	x x.	x x.		x x x.	x
34 bronze satined	35 gold	36 brass	37 bronze fine textured	38 copper												
Optional (Premium): 22 aluminium polished	27 brush-finished aluminium	44 wood veneer, white borders														
*finish No. 32 crocodile black only suitable for L-Version																
Power supply cable		Standard: Z 70 Silver	Optional: Z 71 white	Z 72 grey	Z 73 black		Without power cable	000 Current-carrying F, R, T, K	x x x.	x x.	x x.	x x.	x x.		x	
	Z 74 orange	Z 75 red	Z 76 green													



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

