


TOCCATA

Housing: Pendant light with direct light distribution, 3/ 5 parts aluminium profile, with integrated opal diffuser

Design: MARKUS BISCHOF

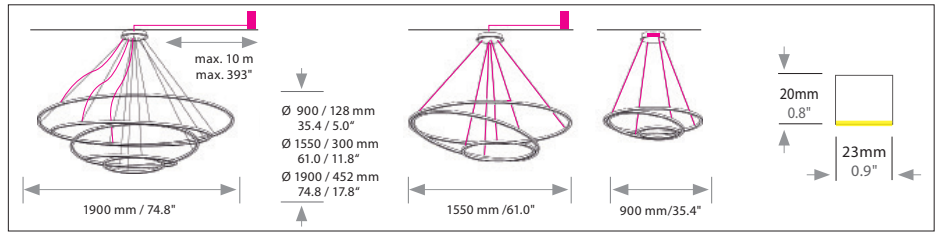

	Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	Ø 900 mm <small>*Ø900-700-380mm</small>	35.4" <small>35.4"-27.5"-14.9"</small>	83	4.840	8.0 / 17.6	777.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1550 mm <small>*Ø1550-1240-700mm</small>	61.0" <small>61.0"-48.8"-27.5"</small>	143	8.291	11.0 / 24.2	771.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1900 mm <small>*Ø1900-1550-1240-900-600mm</small>	74.8" <small>74.8"-61.0"-48.8"-35.4"-23.6"</small>	248	14.580	14.0 / 30.8	773.	X X.	X X.	X X.	X X.	X X X.	X
LED		Standard: Warm-white	3000 K			X X X.	30.	X X.	X X.	X X.	X X X.	X
		Optional: Neutral-white Extra warm-white	4000 K 2700 K			X X X. X X X.	40. 27.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.	X X
Dimming		Standard: Without Dimmer				X X X.	X X.	01.	00.	X X.	X X X.	X
		Optional: 0-10 DALI CASAMBI				X X X. X X X. X X X.	X X. X X. X X.	51. 61. 81.	00. 00. 00.	X X. X X. X X.	X X X. X X X. X X X.	X X X
Finish	Standard:	Optional (Powder coated):										
			12 white, powder coated, similar RAL 9003	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined				
Power supply cable	Standard:	Standard:										
			000 Current-carrying J, F	Z 70 Silver Mounting Version A, I, E	35 gold	36 brass	37 bronze fine textured	38 copper				
		Optional (Premium):										
			22 aluminium polished	27 brush-finished aluminium		XX Custom finish						
						X X X.	X X.	X X.	X X.	X X.	X X X.	X
						X X X.	X X.	X X.	X X.	X X.	X X X.	X



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

TOCCATA




Housing: Pendant light with direct light distribution, 3/ 5 parts aluminium profile, with integrated opal diffuser.

Design: MARKUS BISCHOF

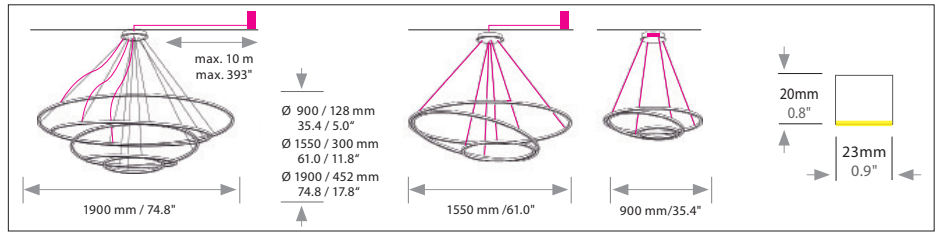


Mounting versions


Standard:



Ø 900 mm / 35.4"
current-carrying steel cables, with power supply in canopy




Ø 1900 mm / 74.8"
14 suspensions through canopy and 3 power supply cables with external power supply unit in suspended ceiling




Ø 1550 mm / 61.0"
6 current-carrying steel cables with external power supply unit in suspended ceiling.
Optional J Ø 1900 mm
14 current-carrying steel cables

Optional:



4/6/14-point suspension with external power supply unit in suspended ceiling



Ø 900 mm / 35.4"
suspensions through canopy with external power supply unit in canopy

I / J = Distance of external power supply unit to light fixture max. 10m / 394".
F, E = Power supply unit in canopy Max. suspension height approx. 2.0 times diameter of light.

Mounting version with steel cable length 3 m / 118" and power supply cable, length 2/3 x 5 m / 2/3 x 197" (1550, 1900)

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

---	---	---	---	---	---	-
-----	-----	-----	-----	-----	-----	---

Complete order number

Power supply units:		Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
	DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A (Ø 900 mm)	IP 20
	DE 2F	363 x 283 x 56 mm / 14.2 x 11.1 x 2.2"	I, J, A (Ø 1550 mm)	IP 20
	DE 3F	363 x 403 x 85 mm / 14.2 x 15.7 x 3.3"	I, J, A (Ø 1900 mm)	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Canopy:		Type/ Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
	DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	F, E (Ø 900)	IP 20
	DB 230S	Ø 230 / 210 / 60 mm / 9.0 x 8.3 / 2.3"	I, J (Ø 1550, 1900 mm)	IP 20
	DB 510S	Ø 510 / 470 / 60 mm / 20.1 x 18.5 / 2.3"	F, E (Ø 1550, 1900)	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes

Colour: Base finish white (12), Cover white (12), contact factory for other finishes

USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional:




CASAMBI wall-switch

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.