
DOPPIO ELLIPSE Housing: Design: DIRECT Design:					SAFTLER		th integrated		5er)			≥3mm 0.9°	46mm 1.8*
Sizes	Size: L x W x H mn 1550 x 775 r 2200 x 910 r 2750 x 1030 r	nm nm	61.0 x 30 86.6 x 35 108.2 x 40	.8"								Finish X X. X X. X X. X X.	Power supply cable X X X. X X X. X X X.	Mounting version X X X
Direct		Standard:	Warm-white									X X.	X X X.	х
CRI > 90 Mac Adam 3	(LED)	Optional:	Neutral-wł Extra warm								Ē	x x. x x.	X X X. X X X.	X X
SELV L80 B10 100.000 h	1			I-willte I								ΧΧ.		X
Dimming		Standard:	Without Di	mmer				X X X.	X X.	01.	00.	х х.	X X X.	Х
		Optional:	0-10 DALI CASAMBI					X X X. X X X. X X X.	X X. X X. X X.	51. 61. 81.	00. 00. 00.	X X. X X. X X.	X X X. X X X. X X X.	X X X
Finish Standard:	12 white, pow- der coated,	Optional (Powder	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined							
	similar RAL 9003	coated):	35 gold	36 brass	37 bronze fine textured	38 copper								
	Optional (Premium):	22 aluminium polished	27 brush-finished aluminium	22, 27 Top cover black	66 bronze anodised brushed	65 champ. gold anodised brushed	XX Custom finish	x x x.	х х.	Х Х.	х х.		x x x.	х
Power supply cable Standard:	Z 70 Silver	Optional:	Z 71 white Z 74 orange	Z 72 grey Z 75 red	Z 73 black Z 76 green	Without power cable 000	ying F, R, T, K	x x x.	х х.	х х.	x x.	х х.		×

www.sattler-lighting.com

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C. / 95° F. 2) Weight of lights without remote technical unit or canopy.



Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animati of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

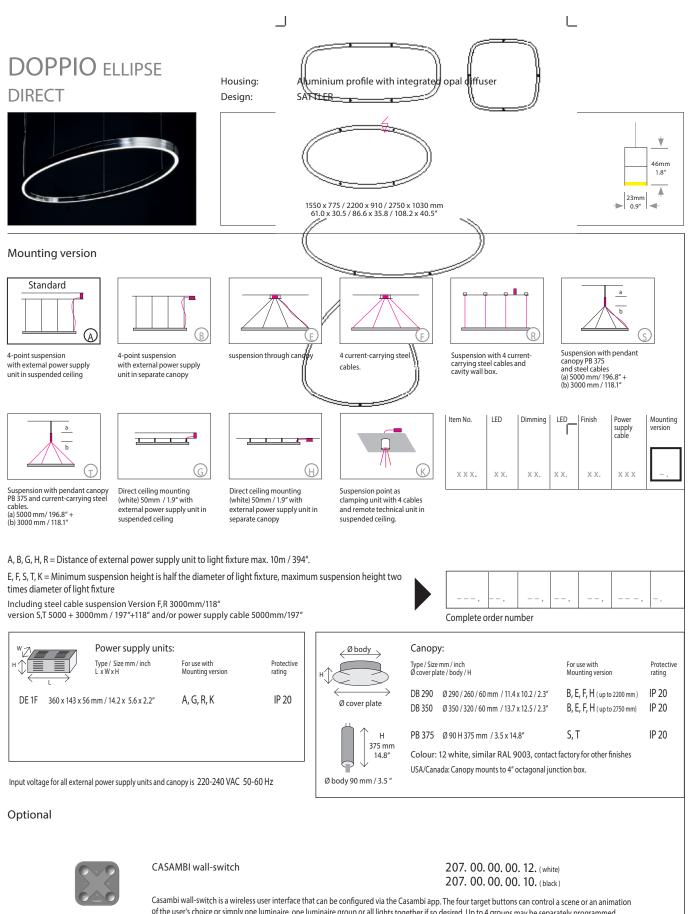

Power cable cover plate for mounting version A

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A..

www.sattler-lighting.com

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C. / 95° F. 2) Weight of lights without remote technical unit or canopy.

200. 00. 00. 00. 12. (white)