



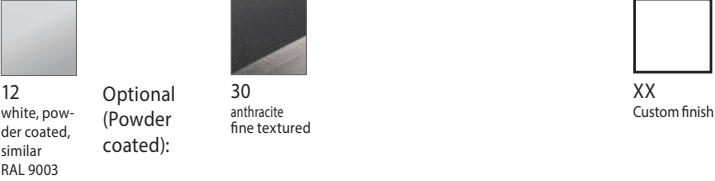
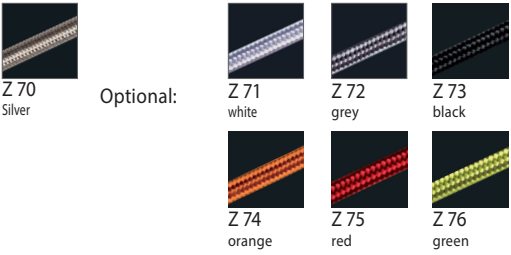


LUCE VERDE ANELLO

Housing: Aluminium-profile with translucent film. Inner surface made of dried moss.
Design: SATTLER

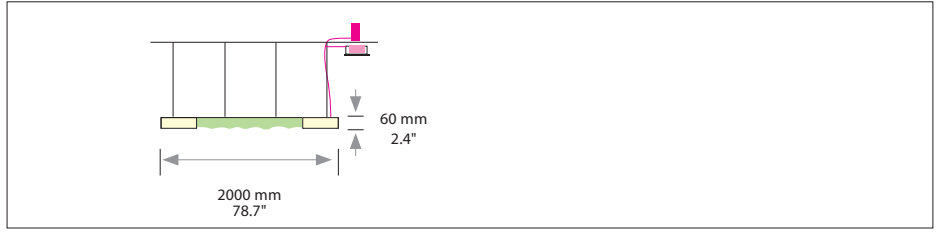

Size: Ø x H mm	Ø x H inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg / lbs	Item No.	LED direct	Dimming	LED indirect	Finishes	Power supply cable	Mounting version	
Sizes	Ø 2000 x 60	300	25.150	59 / 130.1	291.	x x.	x x.	x x.	x x.	x x x.	x	
DIRECT LED CRI > 90 SELV MacAdam 3 L80 B10 100.000 h		Standard: Neutral-white	4000 K		x x x.	40.	x x.	x x.	x x.	x x x.	x	
		Optional: Warm-white	3000 K		x x x.	30.	x x.	x x.	x x.	x x x.	x	
		Optional: Extra warm-white	2700 K		x x x.	27.	x x.	x x.	x x.	x x x.	x	
INDIRECT LED CRI > 90 SELV MacAdam 3 L80 B10 100.000 h		Standard: No indirect LED'S			x x x.	x x.	x x.	00.	x x.	x x x.	x	
		Optional:	Neutral-white	4000 K		x x x.	x x.	x x.	40.	x x.	x x x.	x
			Warm-white	3000 K		x x x.	x x.	x x.	30.	x x.	x x x.	x
			Extra warm-white	2700 K		x x x.	x x.	x x.	27.	x x.	x x x.	x
		RGB colour control*			x x x.	x x.	x x.	60.	x x.	x x x.	x	
Indirect light is significantly weaker than direct light output *(only in combination with dimming DALI, CASAMBI) Combinations up to two stripes of LED possible												
Dimming		Standard: Without Dimmer			x x x.	x x.	02.	x x.	x x.	x x x.	x	
		Optional:	0 - 10 V		x x x.	x x.	52.	x x.	x x.	x x x.	x	
			DALI		x x x.	x x.	62.	x x.	x x.	x x x.	x	
		CASAMBI		x x x.	x x.	82.	x x.	x x.	x x x.	x		
Finish		Standard: 12 white, powder coated, similar RAL 9003			x x x.	x x.	x x.	x x.	---	x x x.	x	
		Optional (Powder coated): 30 anthracite fine textured										
		Optional (Powder coated): XX Custom finish										
Power supply cable		Standard: Z 70 Silver										
		Optional:	Z 71 white									
			Z 72 grey									
		Z 73 black										
		Z 74 orange			x x x.	x x.	x x.	x x.	x x.	---	x	
		Z 75 red										
		Z 76 green										



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 20 Protective rating of luminaire



Direct/indirect light




Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

LUCE VERDE ANELLO


Housing: Aluminium-profile with translucent film. Inner surface made of dried moss.
Design: SATTLER

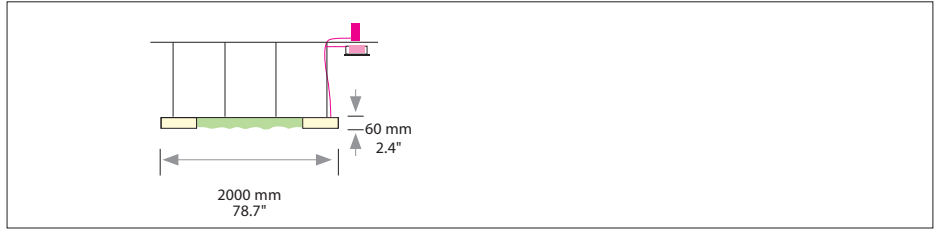

Mounting Version



4-point suspension with external power supply unit in suspended ceiling



4-point suspension with external power supply unit in separate canopy

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	<input type="checkbox"/>

A, B = Distance of external power supply unit to light fixture max. 10m / 39'4"

Min. suspension height 90 mm

Including steel cable suspension 5000mm / 197"
and power supply cable 5000mm / 197"

Complete order number

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Power supply unit: (1 LED Stripe)

Type / Size mm / inch L x W x H	For use with mounting version	Protective rating
DE 3F 363 x 403 x 85 mm / 14.2 x 15.7 x 3.3"	A	IP 20

Canopy: (1 LED Stripe)

Type / Size mm / inch Ø cover plate / body / H	For use with mounting version	Protective rating
DB 500 Ø 510 / 470 mm / 20,0 x 18.5"	B	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Zur effektvollen Beleuchtung des Trockenmooses empfehlen wir den Einsatz separater Spots.
For effective illumination of dried moss we recommend the use of separate spotlights.

Da es sich beim verwendeten Moos um ein Naturprodukt handelt, kann es zu Verfärbungen und Ausbleichen kommen. Dies ist insbesondere bei erhöhter UV-Strahlung möglich. Daher sind Verfärbungen und Ausbleichen als Reklamationsgründe ausgeschlossen.

Since the moss is a natural product, discoloration and fading can occur. This is especially possible with increased UV radiation. Therefore, discoloration and fading are excluded as reasons for complaint.

Für ein lang andauerndes Gesamtbild beachten Sie bitte folgende Pflegehinweise:

Moos darf nicht gegossen oder mit Wasser besprüht werden • Zur Säuberung kann ein sanfter Luftstrahl verwendet werden • Bei zusätzlicher Beleuchtung Leuchtmittel ohne UV-Anteil verwenden • Luftfeuchte über 70% vermeiden • Moos vor extremer Hitze und Frost schützen

To preserve the appearance of the moss, please follow subsequent care instructions:

do not pour or spray water on moss • a gentle stream of air can be used for cleaning • use lamps without UV rays for additional lighting • avoid humidity of more than 70% • protect the moss from extreme heat or frost.


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct/indirect light



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.